




El acabado de la fotografía puede no coincidir con el de la referencia. Para identificar el real ver descripción del acabado.

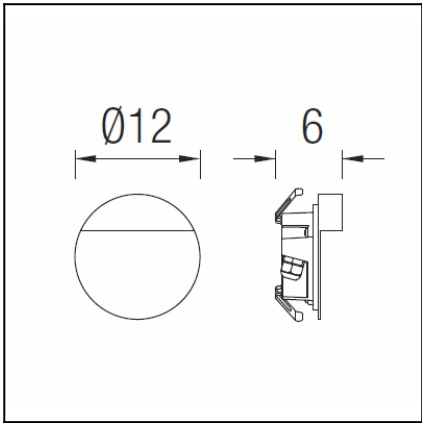

Descargar formato .ldt / .ies

CARACTERÍSTICAS TÉCNICAS

Tipo:	EMPOTRABLE
Índice protección IP:	IP65
Índice resistencia IK:	IK08
Lámpara:	1 x LED Cree. Blanco neutro - 4200K
Potencia (W):	3W
Eficacia luminosa (Lm/W):	94, 94
Voltaje / Frecuencia:	100-240V/50-60Hz
Garantía (Años):	2
Possibilidad de extensión de garantía:	Sí, 5 años
Unidades por caja:	8
Peso neto (Kg):	0.295
EAN:	8,43538E+12



MATERIALES / ACABADOS

Material estructura:	Aluminio inyectado	Material difusor:	Cristal
Acabado estructura:	Gris	Acabado difusor:	Transparente

EQUIPO

Equipo multivoltaje electrónico incluido (110-240 V / 50-60 Hz)

Report No.: 11

Test Time: 2013-1-19 12:13

Luminaire Property

Luminaire Manufacturer: LEDS-C4
Luminaire Category:
Lamp Catalog:
Number of Lamps: 1
Luminous Length (mm): 70
Luminous Height (mm): 10
Current: 0.039 A
Power Factor: 0.454

Luminaire Description: 05-9705
Lamp Description: LED
Lumens per Lamp: 162
Luminous Width (mm): 10
Voltage: 220.6 V
Power: 3.90 W


Photometric Results

CIE Class: Direct
Measurement Flux: 41.4 lm
Downward Ratio: 25.51%
Field Angle: H146.7 V33.4
Luminaire Efficacy Rating (LER): 11
Max. Intensity: 68.2 cd

Total Rated Lamp Lumens: 162.0 lm
Efficiency: 25.53%
Upward Ratio: 0.02%
Beam Angle: H109.8 V25.3
Central Intensity: 45.88 cd
Pos of Max. Intensity: H25 V22

Picture Of Luminaire ...



Luminous Intensity Distribution Curve

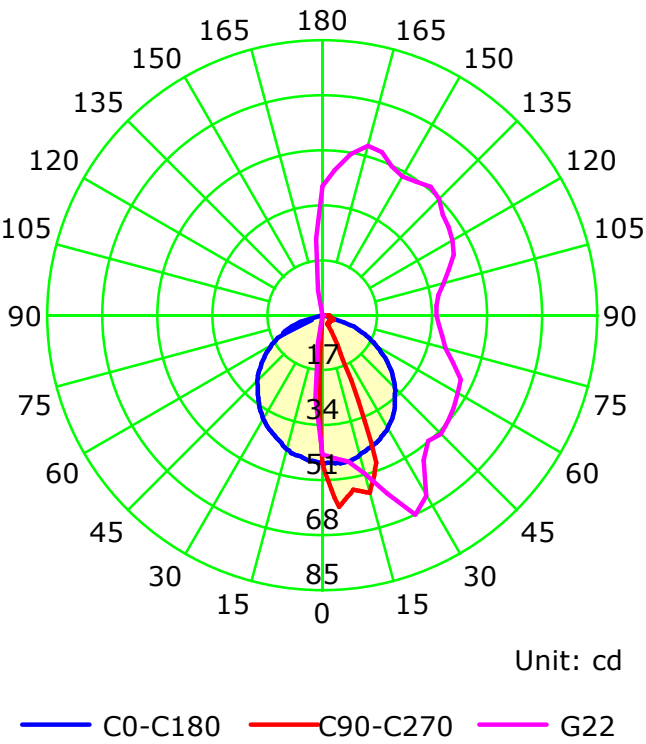


C Plane (°):0.0-360.0: 5.0
Test Lab: INVENTFINE
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 1.871 m
Humidity:
Inspector:

CRISTAL TRANSPARENTE
TRANSPARENT GLASS

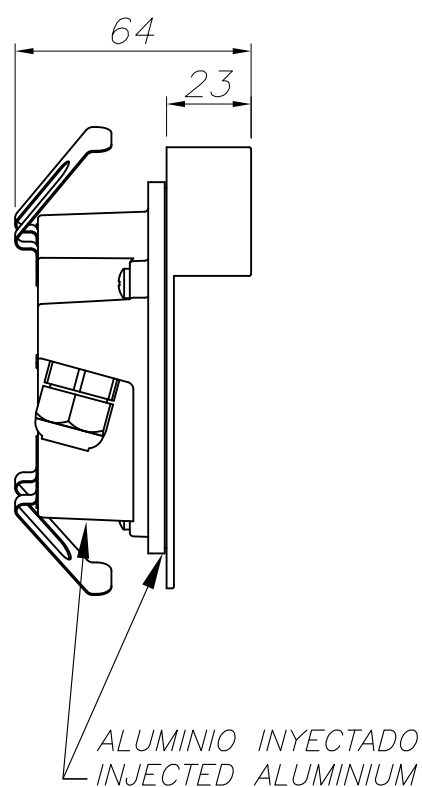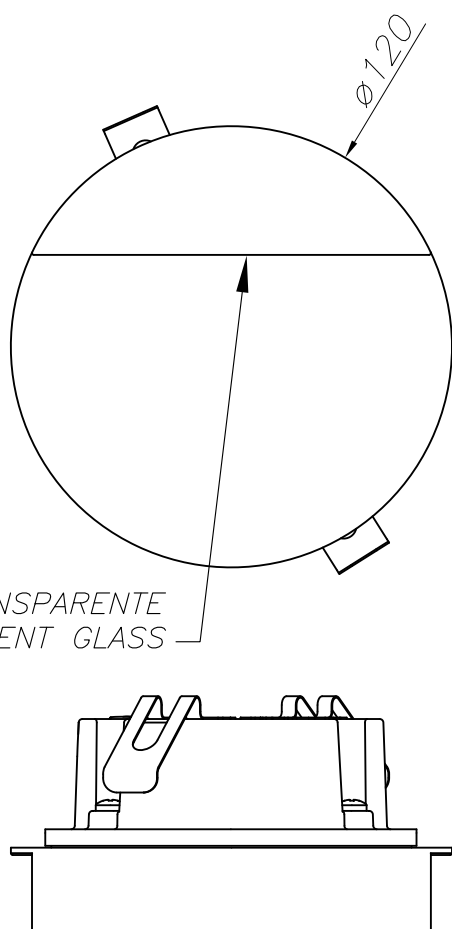

ALUMINIO INYECTADO
INJECTED ALUMINIUM

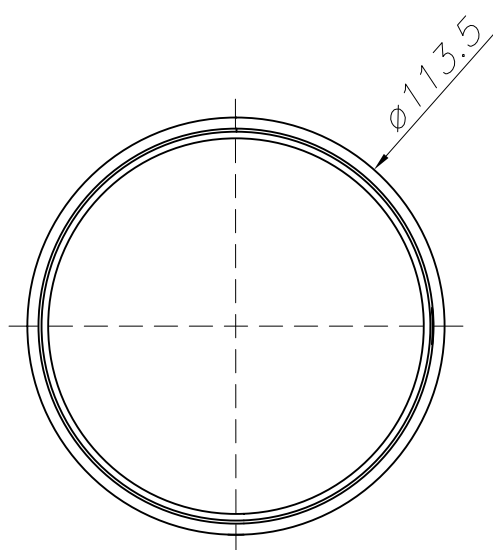

CAJA DE EMPOTRAR
FLUSH FITTING BOX

OUTDOOR

